

BF1718-110

STANDARD: TCD1 Thermostatic Coaxial Shower System

SPECIFICATIONS



Components included

- BF1392: Rainhead with 90° wall arm
- 103574: 2-jet handshower (2 direct positions and 1 shared position)
- 103576: Wallbar
- 101620: 60" flexible and soft PVC hose
- BF1726: 2-way AQUATONIK type T/P 1/2" coaxial valve with diverter
- 106193: Wall outlet

Color (Finish)

• Chrome: BF1718-**110**

Certifications

The specified model meets or exceeds the following standards;



See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.







BF1392

STANDARD: Rainhead with 90° Wall arm

SPECIFICATIONS

Features

- Male water inlet 1/2 NPT
- Rainhead dimension: 195 mm (7 11/16")
- Soft tips for easy cleaning of limescale
- · Adjustable orientation swivel
- Solid brass arm and plastic rainhead construction

Colors (Finishes)

• Chrome: BF1392-110

Maximum flow rate

• 7.6 L/min (2 gpm) at 80 psi

Certifications

The specified model meets or exceeds the following standards;



CSA B125.1




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

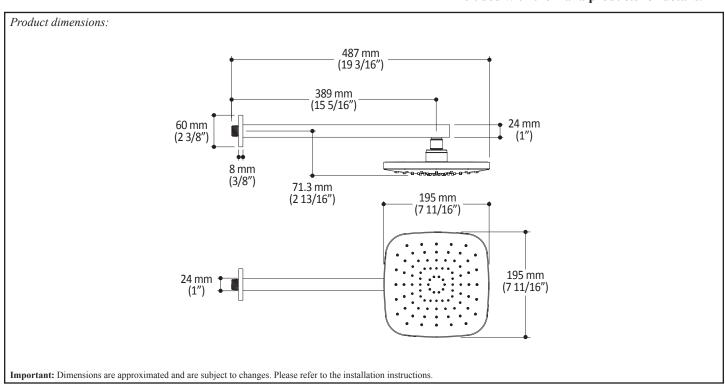



1355, 2º Rue du Parc industriel Sainte-Marie (Québec) Canada G6E 1G9 T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418 387-9089

kaliastyle.com



103574

STANDARD: 2-jet handshower

SPÉCIFICATIONS

Features

- Dimension: 106 mm (4 3/16")
- Anti-scale system with soft sprays Male water inlet G1/2
- 2 direct functions and 1 shared function
- Plastic construction

Colors (Finishes)

Chrome: 103574-110

Maximum flow rate

• 7.6 L/min. (2 gpm) at 80 psi

Certifications

The specified model meets or exceeds the following standards;



CSA B125.1 ASME A112.18.1 ADA






Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

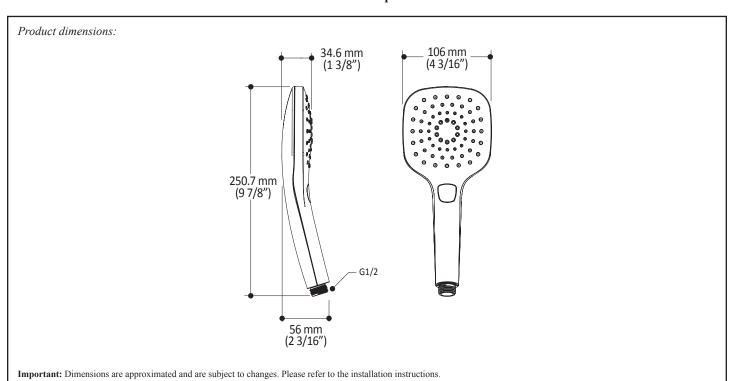



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9

T 418-387-9090 1-877-GO-KALIA (1-87-465-2542) F 418 387-9089

KaliaStyle.com

103576 Wallbar for handshower

SPÉCIFICATIONS

Features


- Total height of 775 mm (30 1/2")
- Easy-to-use gliding system
- Locking system

Colors (Finishes)

Chrome: 103576-110

Pure Nickel PVD: 103576-125


Matte Black: 103576-**160**

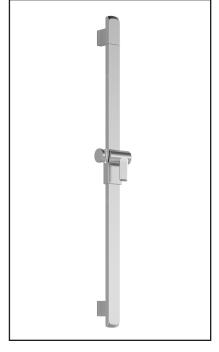

Installation Notes

This product must be installed following the installation instructions provided.

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

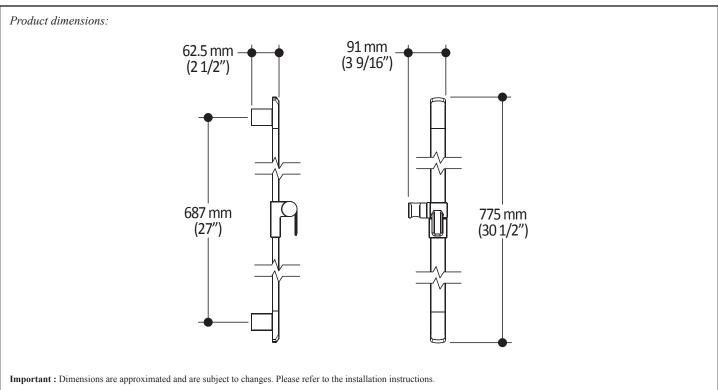



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9

T 418-387-9090 1-877-GO-KALIA (1-87-465-2542) F 418 387-9089

KaliaStyle.com







ONCE UPON A TIME...WATER®

BF1726

2-way AQUATONIKTM type T/P 1/2" coaxial valve with diverter and decorative trim

SPECIFICATIONS

Features

- Solid brass construction
- No visible screw
- Integrated service stops
- Two male water inlets 1/2NPT threaded or welded
- Two male water outlets 1/2NPT threaded or welded
- Total adjustment of 32 mm (1 1/4")
- Can be installed back-to-back
- Support for better stability during installation included

Colors (Finishes)

Chrome: BF1726-110

Volume: 0.014 m³ (0.51 pi³) **Total weight**: 2.32 kg (5.1 lb)

Maximum flow rate

(14 5/8" x 7 1/2" x 8 1/8")

Packaging

• 1 outlet = 25 L/min (6.6 gpm) at 60 psi

Dimensions: 370 mm x 190 mm x 205 mm

2 outlets = 29 L/min (7.7 gpm) at 60 psi



Certifications

The specified model meets or exceeds the following standards;

- ASME A112.18.1 / CSA B125.1
- ICC A117.1




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

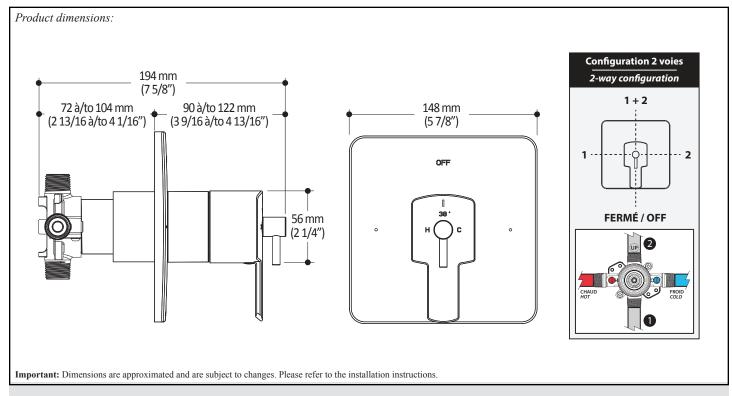



1355, 2e Rue, Parc industriel Sainte-Marie (Québec) Canada G6E 1G9

T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418 -87-9089

KaliaStyle.com f @ \$ 🛗



106193 Wall Outlet

SPÉCIFICATIONS


Features

- Female water inlet 1/2NPT
- Male water oulet G1/2
- · Connector adjustable in depth
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

• Chrome: 106193-**110**

Pure nickel PVD: 106193-125Matte black: 106193-160




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

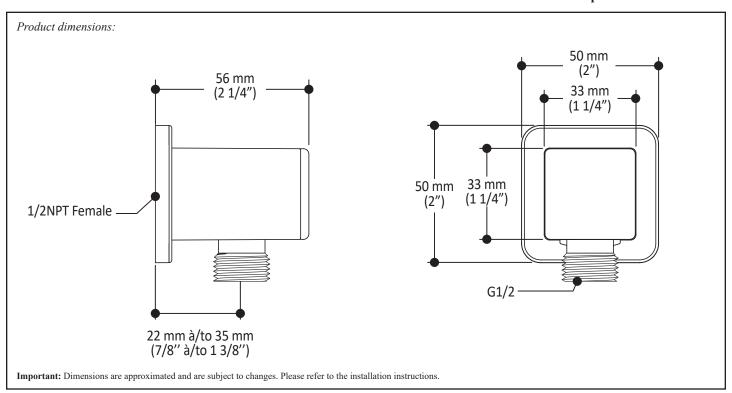



1355, 2nd Street, Industrial Park Sainte-Marie (Québec) Canada G6E 1G9 T 418-387-9090 1-877-GO-KALIA (1-87- 465-2542) F 418 387-9089 KaliaStyle.com



01/21 106193_EN