UMANI™ BF1722



TCD1 Thermostatic Coaxial Shower System SPECIFICATIONS



Components included

- BF1380-XXX* : Rainhead and 90° wallarm
- 102845-XXX* : 2-jet handshower
- 101328-XXX* : Wallbar
- 101620-XXX* : 60" flexible and soft PVC hose
- BF1728-XXX* : 2-way AQUATONIK[™] type T/P 1/2" coaxial valve with diverter and decorative trim
- 101228-XXX* : Wall outlet

* XXX means that the finish color must be specified.

Colors (Finishes)

- Chrome : BF1722-110
- Brushed Nickel PVD : BF1722-120

Certifications

The specified model meets or exceeds the following standards;

ASMĚ A112.18.1 / CSA B125.1 ICC A117.1



See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.



1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418-387-9089

KaliaStyle.com



BF1380 STANDARD: Rainhead and 90° Wallarm SPECIFICATIONS

Features

- Water 1/2" male inlet NPT
- Dimensions: 200 x 200mm (7 7/8" x 7 7/8")
- Anti-scale system with soft sprays
- Adjustable orientation swivel
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1380-110
- Brushed Nickel PVD : BF1380-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Canada G6E 1G9

Packaging

- **Dimensions**: 406mm x 324mm x 133mm (16" x 12 3/4" x 5 1/4")
- Volume: 0.62 cu ft (0.018 cu m)
- Total weight: 2.15 lb (0.975 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

www.KaliaStyle.com

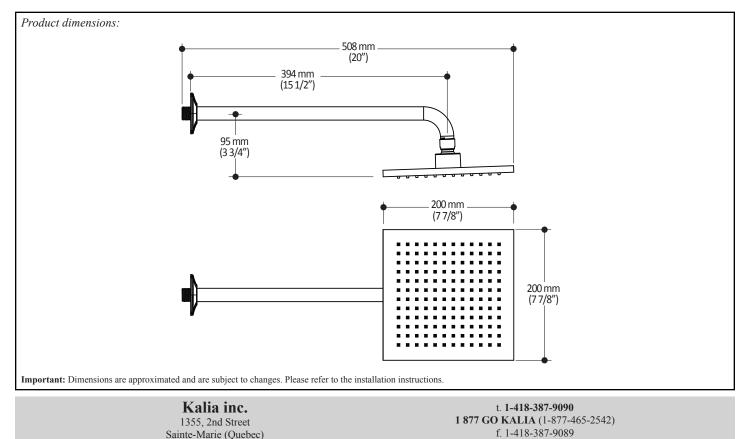



102845 STANDARD : 2-Jet Handshower SPECIFICATIONS

Features

- Dimension: 102mm (4")
- Anti-scale system with soft sprays
- Water G1/2 male inlet
- 2 direct positions and 1 shared position
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 102845-110
- Brushed Nickel PVD : 102845-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Sainte-Marie (Quebec)

Canada G6E 1G9

Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 0.62 lb (0.28 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi



Installation Notes


This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

f. 1-418-387-9089

www.KaliaStyle.com

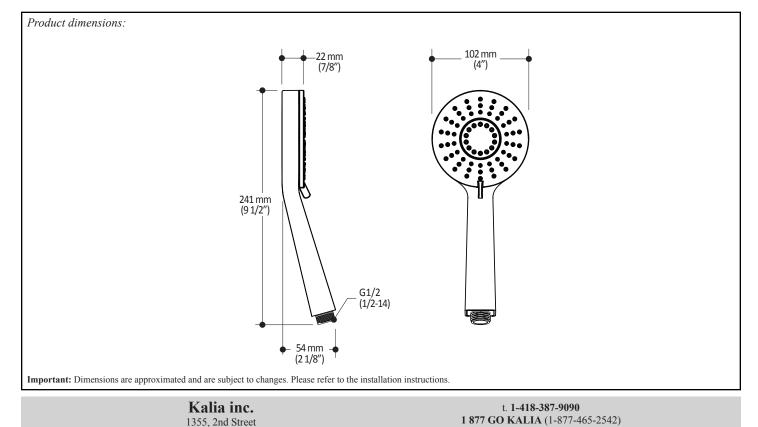

11/14



101328 Wallbar for Handshower

SPECIFICATIONS

Features

- Total height of 762mm (30")
- Locking system of 1/4 turn
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 101328-110
- Brushed Nickel PVD : 101328-120

Packaging


- Dimensions: 832mm x 152mm x 89mm (32 3/4" x 6" x 3 1/2")
- Volume: 0.40 cu ft (0.011 cu m)
- Total weight: 1.9 lb (0.86 kg)

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

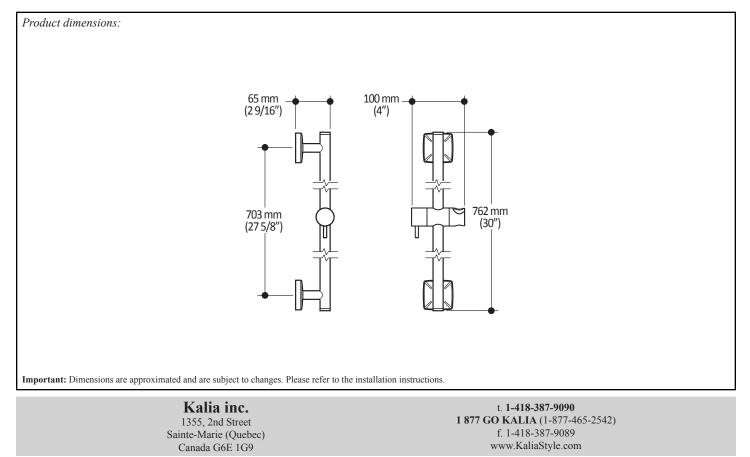



UMANI[™] BF1728

2-way AQUATONIK[™] type T/P 1/2" coaxial valve with diverter and decorative trim

SPECIFICATIONS

Features

- Solid brass construction
- No visible screw
- Integrated service stops
- Two male water inlets 1/2NPT threaded or welded
- Two male water outlets 1/2NPT threaded or welded
- Total adjustment of 32 mm (1 1/4")
- Can be installed back-to-back
- Support for better stability during installation included

Colors (Finishes)

- Chrome : BF1728-110
- Brushed nickel PVD : BF1728-120

Certifications

The specified model meets or exceeds the following standards;

- ASME A112.18.1 / CSA B125.1
- ICC A117.1



Packaging

- Dimensions: 370 mm x 190 mm x 205 mm (14 5/8" x 7 1/2" x 8 1/8")
- Volume: 0.014 m³ (0.51 pi³)
- Total weight: 2.74 kg (6.04 lb)

Maximum flow rate

- 1 outlet = 25 L/min (6.6 gpm) at 60 psi
- 2 outlets = 29 L/min (7.7 gpm) at 60 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included** with the Kalia products for details.

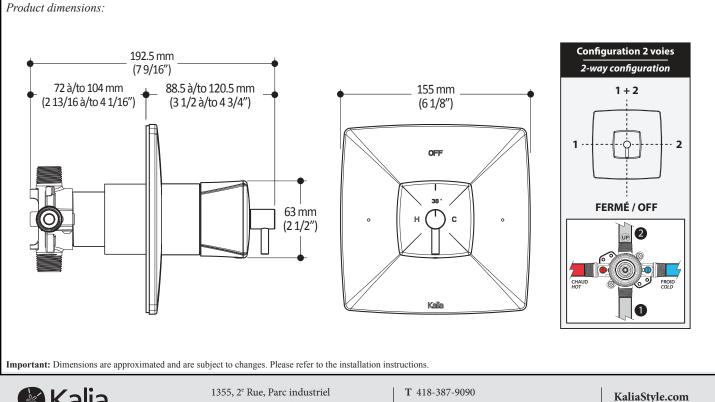



1355, 2º Rue, Parc industri Sainte-Marie (Québec) Canada G6E 1G9

T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418-87-9089 KaliaStyle.com



101228 Wall Outlet **SPECIFICATIONS**

Features

- Water 1/2" female inlet NPT
- Water G1/2 male oulet
- Solid brass construction
- Check valve included
- PVD finish (Physical Vapour Deposit): A high • technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome: 101228-110 •
- Brushed Nickel PVD: 101228-120

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



Canada G6E 1G9

Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- **Total weight**: 0.88 lb (0.40 kg)



Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

