



BF1629-XXX-001

STANDARD: TD3 Thermostatic Shower System

SPECIFICATIONS



Components included

- BF1382-XXX*: Rainhead and vertical ceiling arm
- 102845-XXX*: 2-jet handshower (2 direct functions and 1 shared function)
- 101328-XXX*: Wallbar
- 101620-XXX*: 60" flexible and soft PVC hose
- BF1118-XXX*: AQUATONIK[™] type T/P 1/2" valve and decorative trim
- BF1541-XXX*: 1/2" Volume control valve 3-way diverter and decorative trim (3 direct positions, 2 shared positions and 1 closed position)
- 101228-XXX*: Wall outlet
- 101528-XXX* : Tub spout
- * XXX means that the finish color must be specified.

Colors (Finishes)

- Chrome : BF1629-110-001
- Brushed Nickel PVD : BF1629-120-001

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1
ICC A117.1



See the following sheets for the technical features of each component.

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.



1355, 2nd Street Sainte-Marie (Quebec) Canada G6E 1G9 T 418-387-9090 1-877-GO-KALIA (1-877-465-2542) F 418-387-9089

KaliaStyle.com



BF1382 STANDARD: Rainhead and Vertical Ceiling Arm SPECIFICATIONS

Features

- Water 1/2" male inlet NPT
- Dimensions: 200 x 200mm (7 7/8" x 7 7/8")
- Anti-scale system with soft sprays
- Adjustable orientation swivel
- PVD finish (Physical Vapour Deposit): A high • technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : BF1382-110
- Brushed Nickel PVD : BF1382-120 •

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



Packaging

- Dimensions: 406mm x 324mm x 133mm (16" x 12 3/4" x 5 1/4")
- Volume: 0.62 cu ft (0.018 cu m)
- Total weight: 1.71 lb (0.775 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

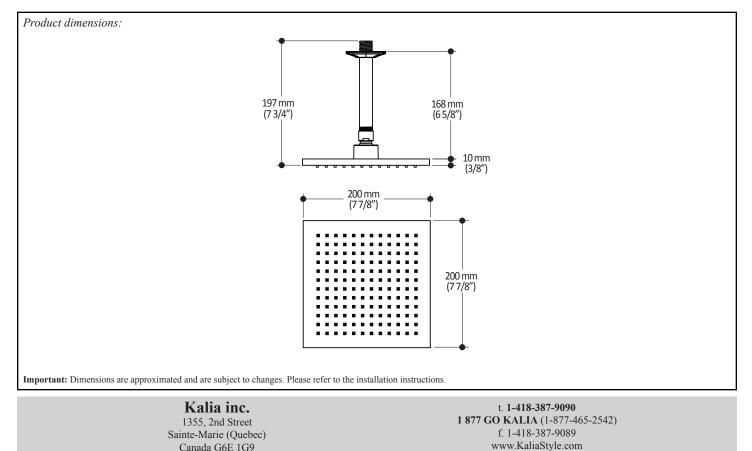

11/14

Canada G6E 1G9



102845 STANDARD : 2-Jet Handshower SPECIFICATIONS

Features

- Dimension: 102mm (4")
- Anti-scale system with soft sprays
- Water G1/2 male inlet
- 2 direct positions and 1 shared position
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 102845-110
- Brushed Nickel PVD : 102845-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Sainte-Marie (Quebec)

Canada G6E 1G9

Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 0.62 lb (0.28 kg)

Maximum flow rate

9.5 liters/min. (2.5 gallons/min.) at 80 psi



Installation Notes


This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

f. 1-418-387-9089

www.KaliaStyle.com

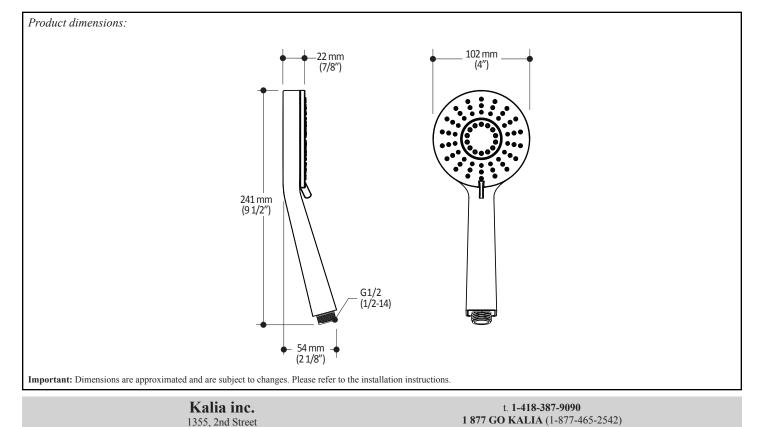

11/14



101328 Wallbar for Handshower

SPECIFICATIONS

Features

- Total height of 762mm (30")
- Locking system of 1/4 turn
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 101328-110
- Brushed Nickel PVD : 101328-120

Packaging


- Dimensions: 832mm x 152mm x 89mm (32 3/4" x 6" x 3 1/2")
- Volume: 0.40 cu ft (0.011 cu m)
- Total weight: 1.9 lb (0.86 kg)

Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

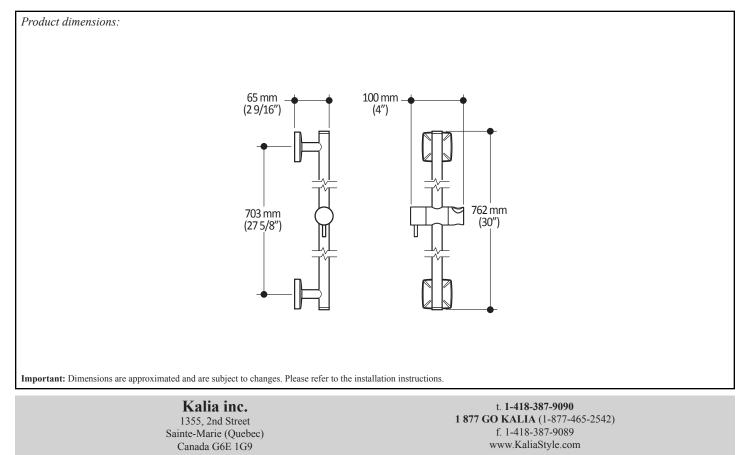

04/12



BF1118

AQUATONIK[™] type T/P 1/2" valve and decorative trim

SPECIFICATIONS

Features

- Solid brass construction
- No visible screw
- Integrated service stops with check valve
- Male water inlet 1/2NPT threaded or welded
- Can be installed back-to-back
- Total adjustment of 19 mm (3/4")

Colors (Finishes)

- Chrome : BF1118-110
- Brushed Nickel PVD : BF1118-120

Certifications

The specified model meets or exceeds the following standards:

- ASME A112.18.1 / CSA B125.1
- ICC A117.1



Installation Notes

Packaging

 $(14 \frac{5}{8} \times 7 \frac{1}{2} \times 8 \frac{1}{8})$

Maximum flow rate

Dimensions: 370 mm x 190 mm x 205 mm

Volume: 0.014 cu m (0.51 cu ft)


• 30 liters/min. (7.9 gallons/min.) at 60 psi

Total weight: 3.4 kg (7.5 lb)

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

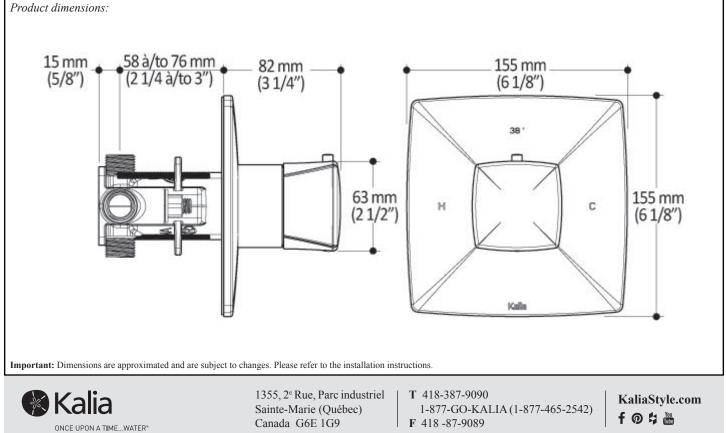

10/18

BF1541



1/2" Volume Control Valve 3 Way Diverter and Decorative Trim

SPECIFICATIONS

Features

- No visible screw
- Water 1/2" male inlet NPT threaded
- Solid brass construction
- Total adjustment of 19 mm (3/4")
- Support for better stability during installation included

Colors (Finishes)


- Chrome : BF1541-**110**
- Brush Nickel : BF1541-120

Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 2.2 lb (1.0 kg)

Maximum flow rate

- 1 outlet: 22.5 liters/min. (6 gallons/min.) at 60 psi
- 2 outlets: 23.5 liters/min. (6.7 gallons/min.) at 60 psi



Certifications

The specified model meets or exceeds the following standards;

- ASME A112.18.1 / CSA B125.1
- ICC A117.1




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

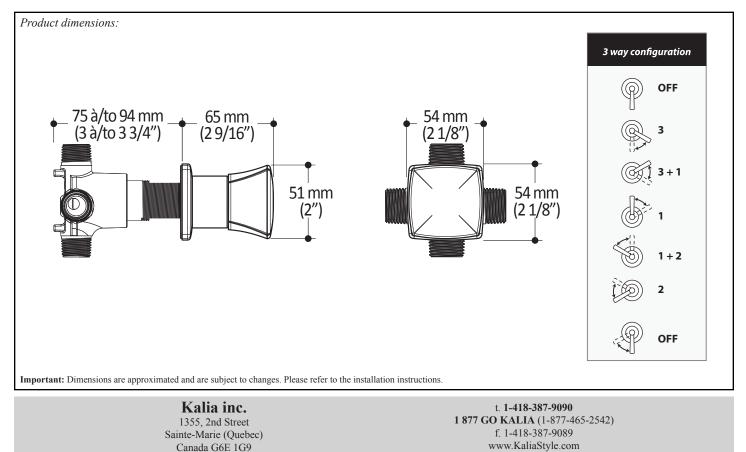



101228 Wall Outlet **SPECIFICATIONS**

Features

- Water 1/2" female inlet NPT
- Water G1/2 male oulet
- Solid brass construction
- Check valve included
- PVD finish (Physical Vapour Deposit): A high • technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome: 101228-110 •
- Brushed Nickel PVD: 101228-120

Certifications

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 0.88 lb (0.40 kg)




Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

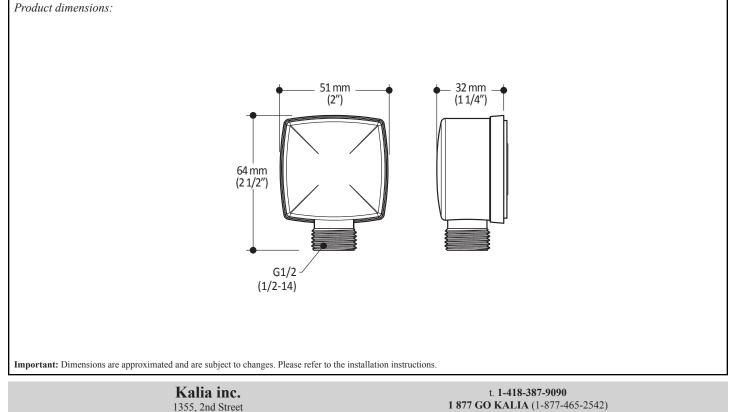

Sainte-Marie (Quebec) Canada G6E 1G9

1877 GO KALIA (1-877-465-2542) f. 1-418-387-9089 www.KaliaStyle.com



UMANITM 101528 Tub Spout SPECIFICATIONS

Features

- Solid brass construction
- Hidden water jet
- High water flow
- Water 1/2" female inlet NPT
- PVD finish (Physical Vapour Deposit): A high technology process that protects the surface finish for increased durability

Colors (Finishes)

- Chrome : 101528-110
- Brushed Nickel PVD : 101528-120

Certifications

The specified model meets or exceeds the following standards;

• ASME A112.18.1 / CSA B125.1



Packaging

- **Dimensions**: 305mm x 117mm x 92mm (12" x 4 5/8" x 3 5/8")
- Volume: 0.12 cu ft (0.003 cu m)
- Total weight: 1.10 lb (0.50 kg)



Installation Notes

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details**.

