
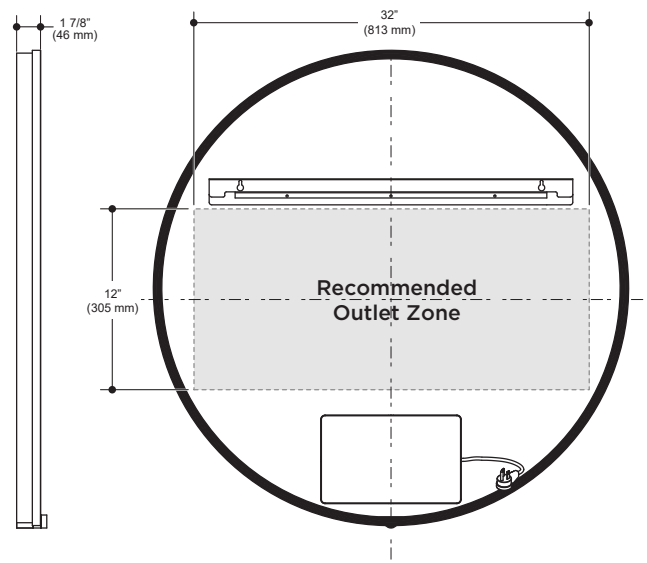
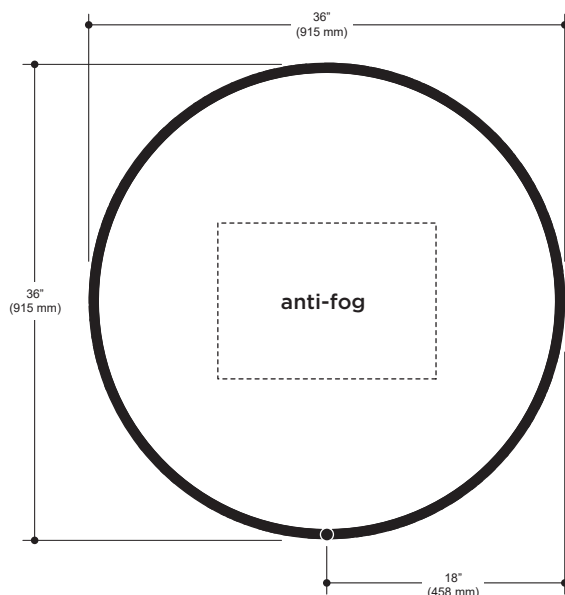


Nox

Round mirror, indirect concealed LED lighting and touch-switch integrated into the frame for color temperature control

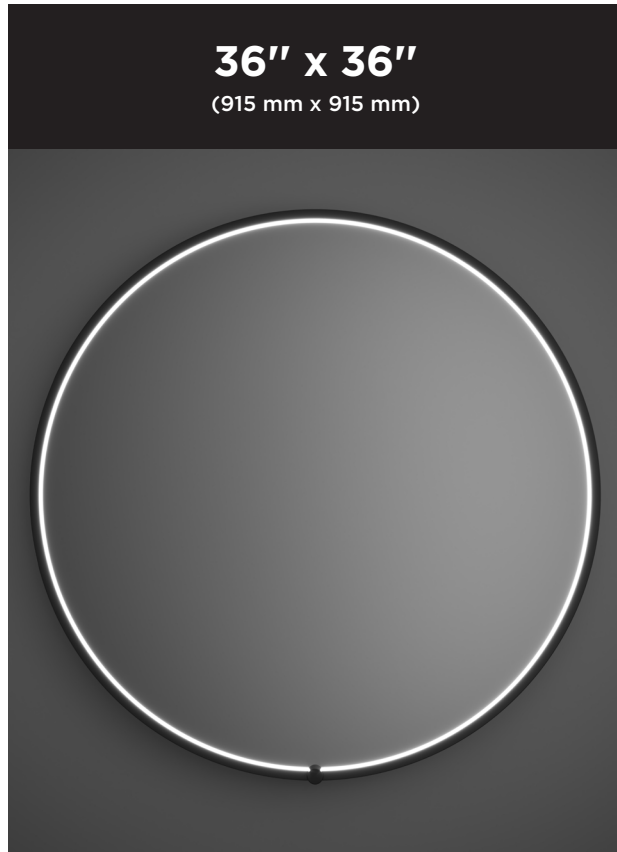

FEATURES

Model #	MR2201-570-XXX*
Packaging mm (in)	1025 x 1030 x 115 (40.4 x 40.6 x 4.5)
Mirror thickness	4 mm
Weight kg (lb)	11.3 (24.9)
Certification	ETL Intertek
Anti-fog system	Included
Open and close dimming effect	Yes
Reversible	No
Total thickness	46 mm (1 7/8")
Automatically opens with wall switch	Yes
Frame*	Black -001 or Pure Nickel -125
Connection type	Plug

LIGHTING

Power (watt)	46 W
Input (volt)	120 V
Lumens	1565 lm
Color temperature controlled by maintaining the touch-switch	from 2700k to 6000k
Frequency	60 Hz
Color Rendering Index (CRI)	90+