

**101611****1/2" Thermostatic coaxial 3-way diverter valve****SPECIFICATIONS****Features**


- 1/2" NPT male inlet - threaded or sweat
- Integrated service stops
- Total adjustment of 19mm (3/4")
- 3-way diverter with 2 shared positions
- Ceramic cartridge
- Support for better stability during installation included
- Solid brass construction

Packaging

- **Dimensions:** 170mm x 135mm x 190mm
(6 11/16 x 5 5/16 x 7 1/2)
- **Volume:** 0.14 cu ft (0.004 cu m)
- **Total weight:** 2.87 lb (1.30 kg)

Maximum flow rate

- 40 L/min (10.56 gpm) at 60 psi

**Certifications**

The specified model meets or exceeds the following standards;

ASME A112.18.1 / CSA B125.1


**Installation Notes**

This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. **Refer to the warranty included with the Kalia products for details.**

Product dimensions:

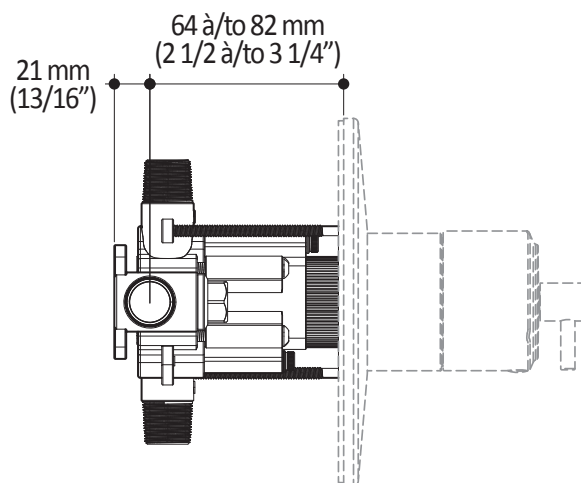

Important: Dimensions are approximated and are subject to changes. Please refer to the installation instructions.



ONCE UPON A TIME...WATER®

1355, 2nd Street
Sainte-Marie (Quebec)
Canada G6E 1G9

T 418-387-9090
1-877-GO-KALIA (1-877-465-2542)
F 418-387-9089

KaliaStyle.com

