



Kalia

ONCE UPON A TIME...WATER®

DISTINK™ 60" x 36"

DR1747/DR1749

60" x 36" Pivot Door with KaliaPROTEK™

SPECIFICATIONS

Features

- Frameless pivot 2-panel shower door for corner shower
- Panel in clear tempered glass of 8 mm (5/16") with **KaliaPROTEK™** protective film (the protective film is installed on the outside of the panels) with **Duraclean treatment** for easy maintenance
- Ultra-strong stainless steel hinges placed at the top and bottom of the panel for sleek look
- Linear bracing bar with optimal clearance for rainheads
- 1956 mm (77") panel height provides freedom of movement
- Door access: 595 to 722 mm (23 1/2" to 28 1/2")
- 200 mm (8") ergonomic inside and outside handles
- Sealed magnet ensuring door to shut watertight
- 8 mm (5/16") clear tempered glass with Duraclean treatment for easy maintenance
- Reversible unit
- The shower door is a one-person installation



Finish

Chrome

- DR1747-110-XXX
- DR1749-110-XXX

Matte Black:

- DR1747-160-XXX
- DR1749-160-XXX

Glass pattern

Clear tempered glass with KaliaPROTEK™:

- DR1747-XXX-005
- DR1749-XXX-005



KaliaPROTEK™

This door can be installed with the following Kalia shower base(s) model(s);

- BW1107 • BW1213
- BW1193 • BW1194
- BW1283 • BW1284
- BW1966

INSTALLATION NOTES




Minimum threshold required for installation is 25 mm (1"). This product must be installed following the installation instructions provided.

WARRANTY

Kalia Inc. guarantees all aspects of its products to be free of defects in material and workmanship for normal residential use. Refer to the warranty included with the Kalia products for details.

DR1747-XXX-005/
DR1749-XXX-005;
Right opening shown

Template tool
included

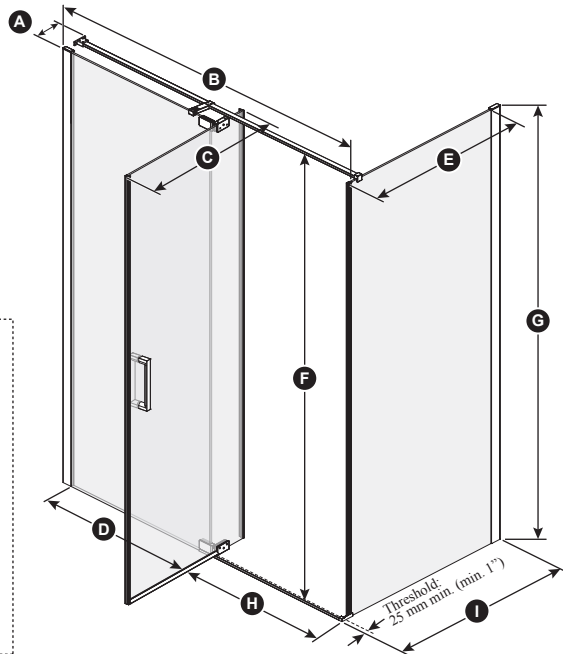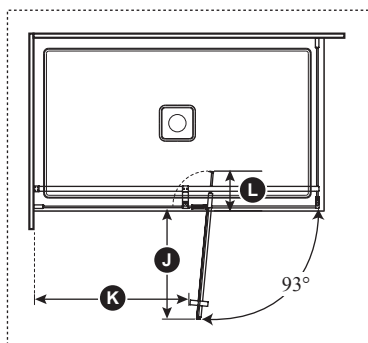

Door dimensions

A	129 mm (5")
B	1422 mm to 1575 mm (56" to 62")
C	Mobile panel: 830 mm (32 11/16")
D	Fixed panel: 769 mm (30 1/4")
E	Return panel: 798 mm (31 7/16")
F	1941.5 mm (76 7/16")
G	Door Height: 1956 mm (77")
H	595 to 722 mm (23 1/2" to 28 1/2")
I	864 mm to 883 mm (34" to 34 3/4")
J	600 mm to 750 mm (23 5/8" to 29 1/2")
K	Min. Clearance: 727 mm (28 5/8")
L	Excess 77 mm to 229 mm (3" to 9")

Important: Dimensions are approximated and are subject to changes. Please refer to the installation instructions.



Kalia

ONCE UPON A TIME...WATER®

1355, 2nd Street, Industrial Park
Sainte-Marie (Québec)
Canada G6E 1G9

T 418-387-9090
1-877-GO-KALIA (1-87- 465-2542)
F 418 387-9089

KaliaStyle.com